
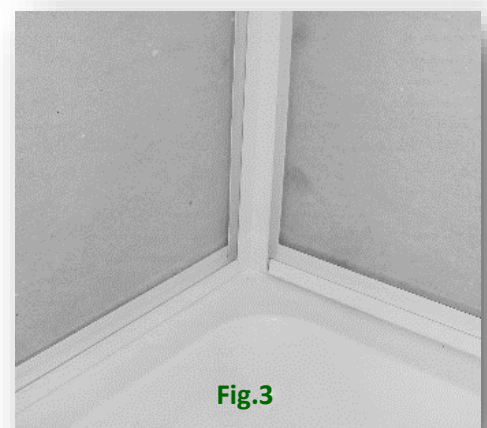
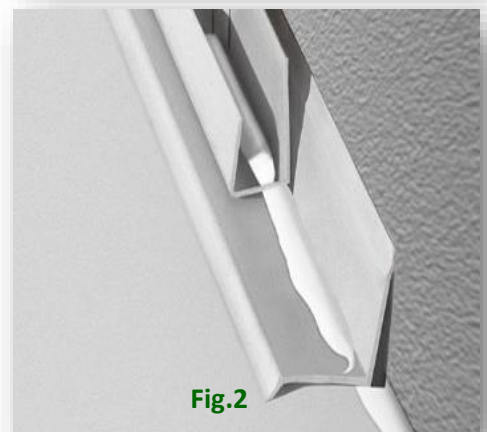


Installing Enviroclad Decorative Cladding:

- Ensure walls are clean & dry. Remove loose tiles, loose paper, and flaking paint.
PVA bonding mixed 1-4 with water can be applied to walls that are dusty or crumbling prior to installation.
- Ensure shower tray/bath is fully installed. Remove/loosen fittings from walls. (Shower fittings, soap holders, etc.).
- Seal bath trim (if using) into position using Parasilico Premium sealant supplied by Enviroclad. (Fig.1)
- Fit bottom Starter trim onto Bath seal using Parasilico Premium silicone supplied by Enviroclad (Fig.2).
- **Fill bottom Starter trim with Silicone 799** (Fig.2)
- At a corner:
 - Option 1: fit Internal Corner Profile (fig.3)
 - Option 2: butt join planks in the corner and seal with silicone 799 (fig 4.)
 - Option 3: apply bead of silicone799 (Figs .5.).
 - Option 4: Panel can be folded around the corner, Only recommended for small areas, not suitable for a full bathroom.
- Cut first plank to length - less 7mm, to allow fitting into top and bottom Starter trims {also allows for expansion}.
- Apply adhesive to reverse of plank in a zig-zag pattern, edge to edge.
- Fit plank in position & press firmly onto wall.
- If cladding shower/over bath, seal lip of each plank with silicone before fitting the next to ensure watertight seal (Fig.6)
- Cut top Starter trim to length and place in position.

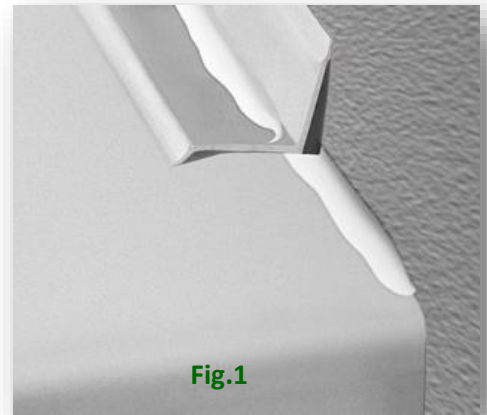

- External Corner and angle profiles are available for use on corners if required. (Around door, window etc.)
- When fitting cladding to a shower, Starter trim can be used as a stop bead at shower door or to finish edge of the final plank.
- Ensure adhesive and sealant are cleaned from face of cladding before they set. Silicone and Adhesive cleaner now in stock
- Cladding can be fitted behind radiators but is not suitable for use with a direct heat source, e.g. solid fuel cookers {heat greater than 60°C).
A stainless steel or Toughened glass panel should be fitted behind cookers/hobs.
- Please refer to the current brochure for full product details.
- Recessed Lighting: Please note that only PL, LED or CL type low energy down lighters are suitable for use with Enviroclad ceiling panels



Fig.4

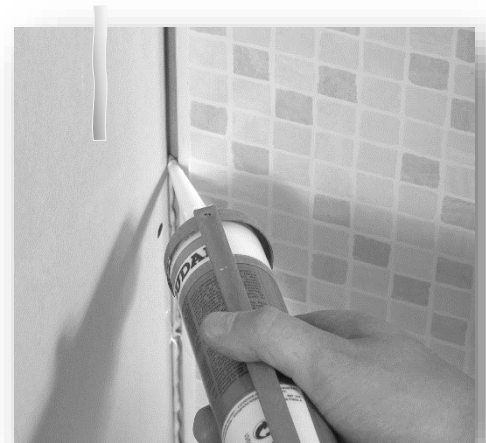


Fig.5

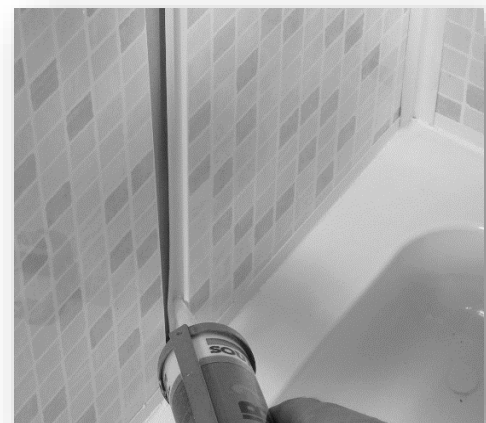


Fig.6

Unit 57b, Hebron Industrial Estate, Hebron Road, Kilkenny, Ireland.

Tel: +353 56 7752866 | Fax: +353 56 7770955 | E-mail: info@enviroclad.com | Website: www.enviroclad.com