

Issue Date 30.03.2022

Multiwall Polycarbonate Price List (Supply Only, inc. VAT @ 23%)



Name:		Dimensions:		
Date:		Contact:		
Note: Please do NOT remove edge tape from the sheets when fitting!				
Description	Size	No.	Price Each	Total Due €
10mm CLEAR Multiwall Polycarbonate Sheets (Light Transmission 83-88%)				
10mm Multiwall Polycarbonate - 3.5m	2.1m x 3.5m x 10mm		€162.50	
10mm Multiwall Polycarbonate - 7m *	2.1m x 7m x 10mm		€310.00	
16mm CLEAR Multiwall Polycarbonate Sheets (Light Transmission 67-72%)				
16mm Multiwall Polycarbonate - 3.5m	2.1m x 3.5m x 16mm		€268.00	
16mm Multiwall Polycarbonate - 7m *	2.1m x 7m x 16mm		€516.00	
BRONZE available to order. Leading time 3/4 days. Cost + 55%				
Trims & Fixings				
PVC Capping Bar + Gasket, End Cap, Screws - White	3m		€83.36	
PVC Capping Bar + Gasket, End Cap, Screws - White	4.8m		€124.00	
Aluminium "F" Trim - White	3m		€65.00	
PVC "U" Trim - White	2.1m		€15.00	
Nylon Fixing Button	Each		€1.48	
Sealing Tape (for Ridge End of Sheet)	Per Metre		€1.48	
Anti-Dust Tape (Supplied on Pre-Cut Panels)	N/A		N/A	
Butyl Flashing - White	200mm x 10m		€150.00	
Hollow Soffit Joiner Trim	5m		€11.01	
Hollow Soffit Starter Trim	5m		€9.16	
Extras				
Delivery / Invoice Address:			Subtotal	€0.00
			Delivery	
			Total	€0.00

* Extra delivery charge applies for 7m sheets delivered in full size

Full cutting service available - allow 2-3 days from order


Supply & Fit: Payment due to fitter upon completion - cash or cheque only

Unit 57B, Hebron Industrial Estate, Hebron Road, Kilkenny

T: 056 775 2866 | F: 056 777 0955 | E: info@enviroclad.com | Payment terms: enviroclad.com/terms

261 Rafter Gasket System

For use with Multiwall Polycarbonate Sheet
in Pitched Roofglazing Applications

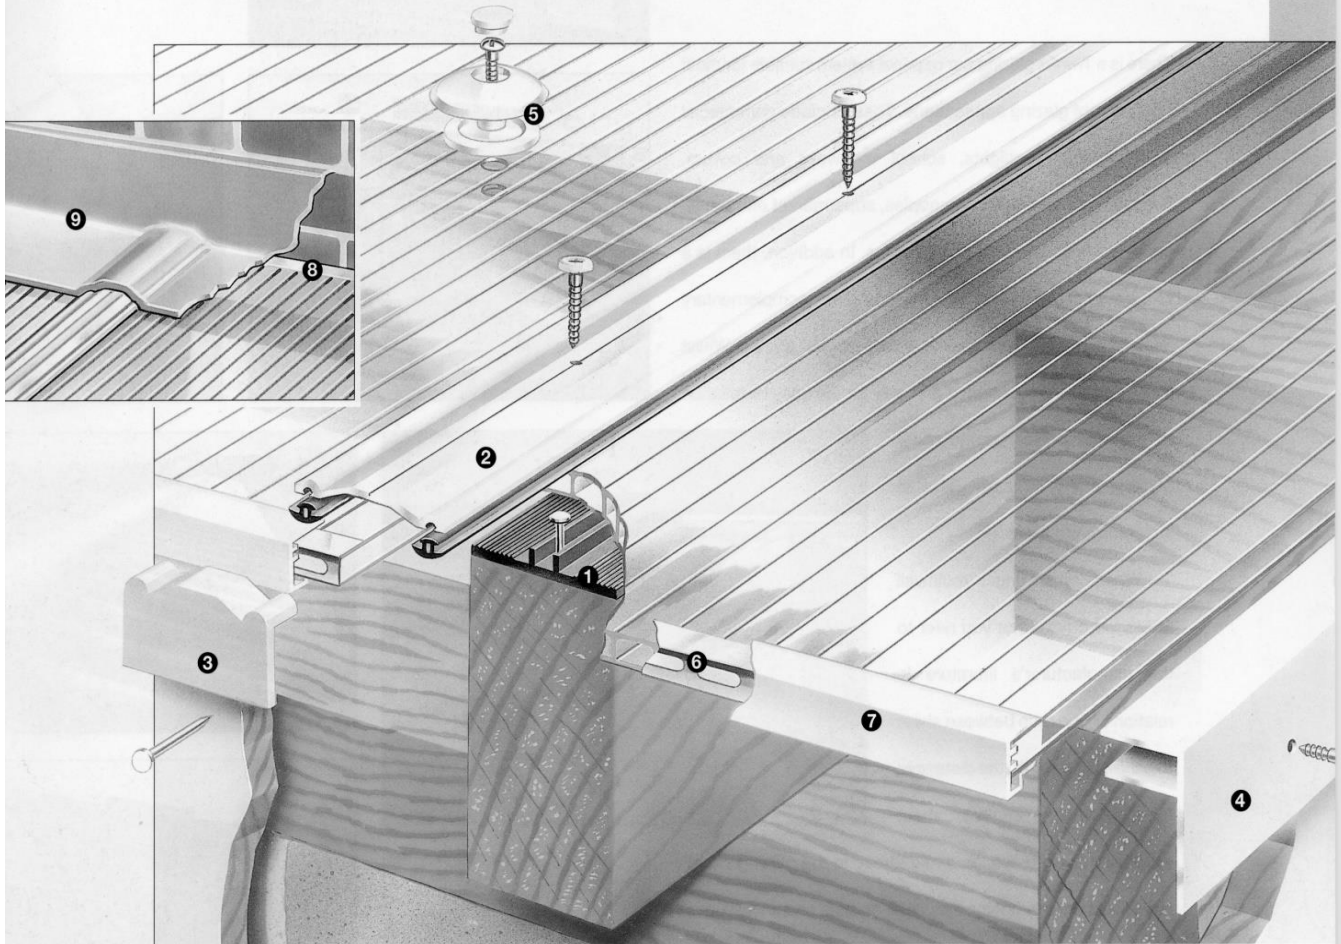

For installing multiwall polycarbonate sheet thicknesses from 4mm to 20mm on wooden rafters.

- 1** EPDM 'Rubber' Rafter Gasket Ref 261. Should be nailed to rafters through the centre channel. Nails to be 300mm apart.
- 2** Screw-on Aluminium Capping Bar Ref 226 with 226G Gasket fitted. Cap should be fixed down with screws no more than 400mm apart.
- 3** Push-fit Polycarbonate Stop End Plate Ref 226EP gives a neat finish.
- 4** Aluminium Right Angle 'F' Profile Ref 222 supports the sides of the glazing sheet and weathers the edge of the roof slope. Should be fixed to barge boards with screws 300mm apart. Use a spirit level to ensure that the sheet remains level.
- 5** Nylon Fixing Button (with Foam Washer) Ref 244 for spot fixing to rafters, purlins, etc, on roofs with a slope of 10° or more. Use sharp bits to drill 14mm hole in multiwall sheet.
- 6** Anti-Dust Tape Ref 4840. Use at eaves (gutter) ends of multiwall sheet to help prevent dust entry, whilst allowing condensation drainage. 25mm wide for sheet 4mm-8mm thick; 38mm wide for sheet 10mm-20mm thick.
- 7** Aluminium 'U' Profile Ref 252. Covers and protects Anti-Dust Tape, whilst giving a rigid and neat finish to the cut sheet edge.
- 8** Sealing Tape Ref 4810. Permanently closes ridge (top) ends of multiwall sheet. Should be used in combination with 4840 Tape above. Widths as above.
- 9** Butyl Flashing, Ref 200/10, ensures a weatherproof seal at the ridge.

Do NOT overtighten – it should be possible to just turn the button by hand.